


EN-564

ACCESSORY CORD

UIAA-102

This representation of EN 564 and UIAA 102 does not contain the full details of the test methods and requirements in these standards; it gives only a simplified pictorial presentation. For full details, EN 564 and UIAA 102 should be consulted. © Copyright. This material may not be copied for commercial use.

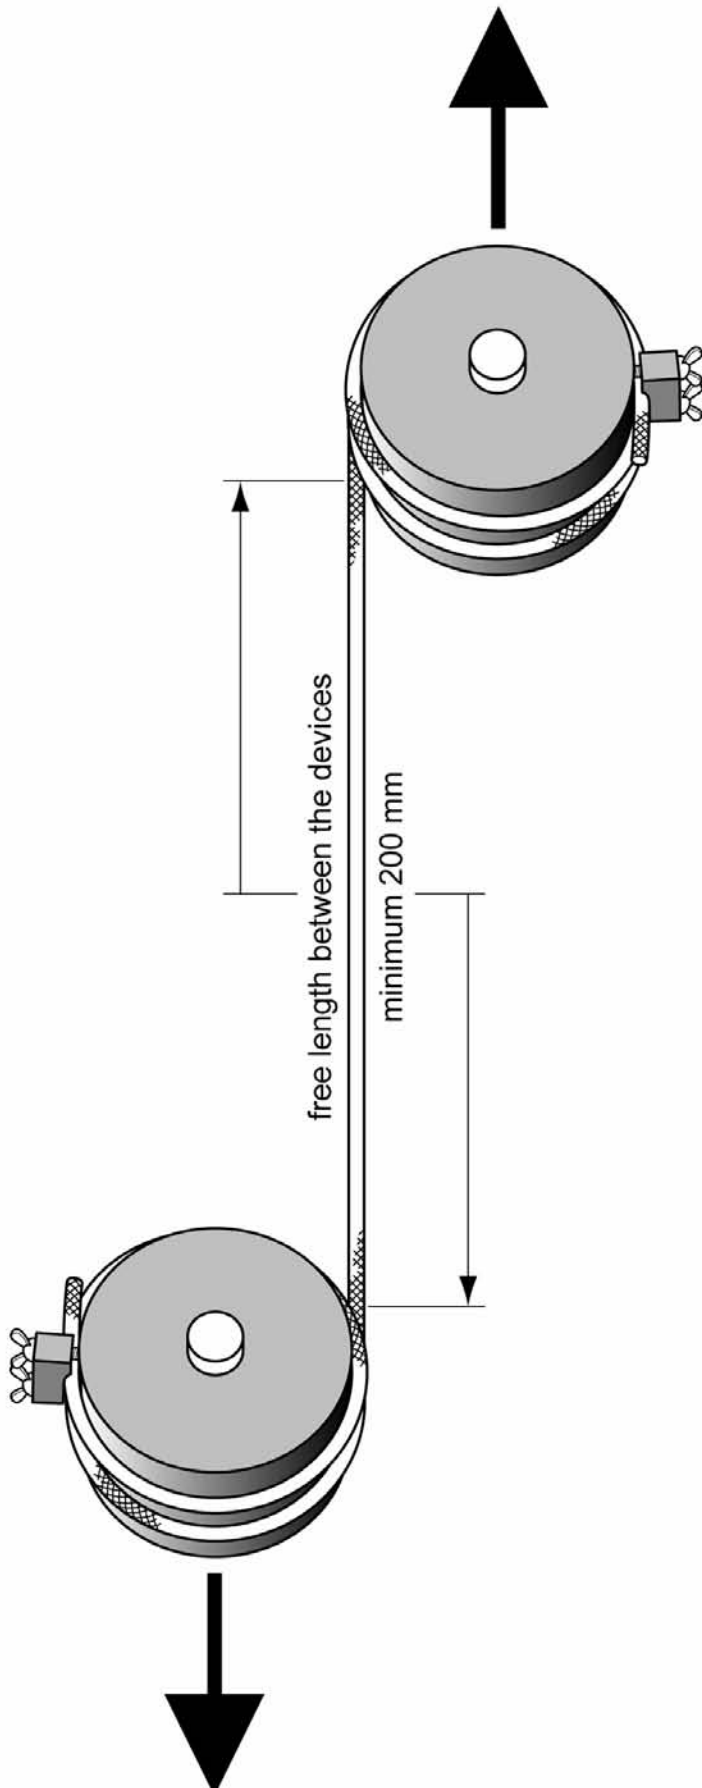

The diameter of accessory cord shall have a whole number value between 4 and 8 mm with tolerances of $(\begin{smallmatrix} +0.5 \\ -0.2 \end{smallmatrix})$ mm

The minimum strength shall be as shown in the table

nominal diameter mm	minimum strength kN
4	3.2
5	5.0
6	7.2
7	9.8
8	12.8

Additional UIAA requirement

If accessory cord is sold on a drum or otherwise packaged, the whole length shall be one piece.